

Canaletas
SOURCE OF LIFE




Series EF

Semi-recessed drinking fountains

Wall mounted barrier-free access, modular system
Allows supplying water to multiple fountains simultaneously.

Superior quality, made entirely of stainless steel, 100% recyclable

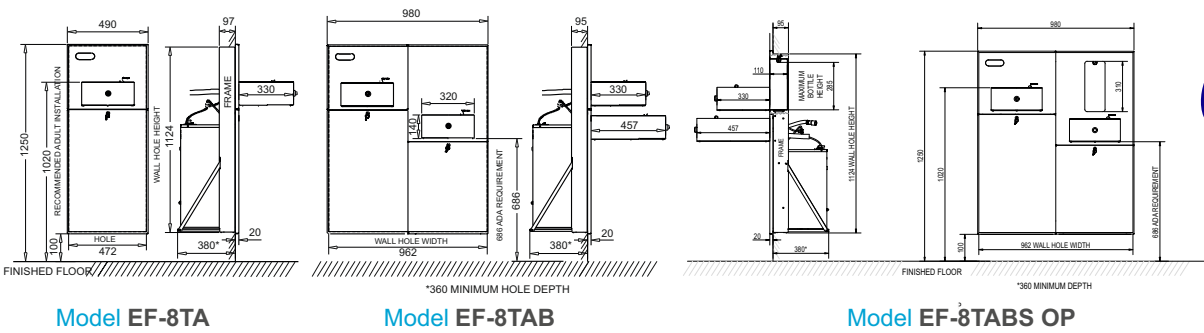

Model EF-8TA

WATER FILTERS

Improve water quality.
Explore different filtration options:
Activated carbon, Sediment,
Ultraviolet or Reverse osmosis.

Series EF

Allows different water supply combinations.
Adults, children, or people with reduced mobility.

Thanks to the coupling of drinking water fountains and cooling unit, several people can be supplied simultaneously. The installation of the cooling unit inside the wall offers greater free passage space. All elements manufactured from high thickness stainless steel: top plate, front panels, bottle filling station, interior chassis and cooling unit. Stainless steel water nozzle with hygienic protection. Anti-vandalism front push button and regulation of water height through exclusive high precision membrane valve. Deep rounded top plate with anti-splash design. Removable lower ventilation panel for easy maintenance access. Interior structure supporting the top plate, bottle filling station, panels and cooling unit. Cooling unit powerful and compact. Easily regulated cold water temperature (thermostat). Possibility of emptying the cooling unit for greater hygiene.

Bottle filling station: designed for convenient and secure bottle placement. Blue LED highlights the filling area and adds a modern look. Operated by sensor or push button. In sensor models, water dispensing is time-limited for safety reasons.

Models. Modular system

One or multiple users, depending on height, dimensions, and nº of plates

- A** Adult. H: 1020mm; DIMS.: 140 (H) x 320(W) x 330(D)mm
- B** Disabled. H: 686mm (ADA); DIMS.: 140mm (H) x 320(W) x 457(D)mm
Compliant with ADA (Americans with Disabilities Act), Institut Guttmann
- C** Child. H: 610mm (ADA); DIMS.: 140mm (H) x 320(W) x 330(D)mm

(As a minimum the adult (A) option is always necessary to couple other heights).

Models with:

- LV: Top plate with cup filler.
- S OP: With bottle filling station. Sensor: cold water
- S 2PU: With bottle filling station. Push-button: cold and ambient water



Model EF-8TAC



Model EF-8TABS OP



Cooling unit

Powerful and compact.
Exclusive design.
Front ventilation.


Technical data

Series EF-8	
Cooling power (W)	700
Power consumption (W)	230
Voltage 230V 50Hz single-phase (A) (Other options available)	1.1
Continuous cooling capacity (Room temp.: 30°C, In: 27°C, Out: 17°C) (l/h)	60
Water output speed (l/h)	60
Water tank capacity (l) (Optional: Stainless steel cooling system. Direct chill)	4.5
Cold water output temperature (Regulated by thermostat) (°C)	4-11
Refrigerant gas (CFC-free)	R290*
Net weight (kg) Model EF-8TAB	60

*R-290 is a natural refrigerant with no ozone impact. It offers high efficiency and reduces energy consumption.



98/83/EC

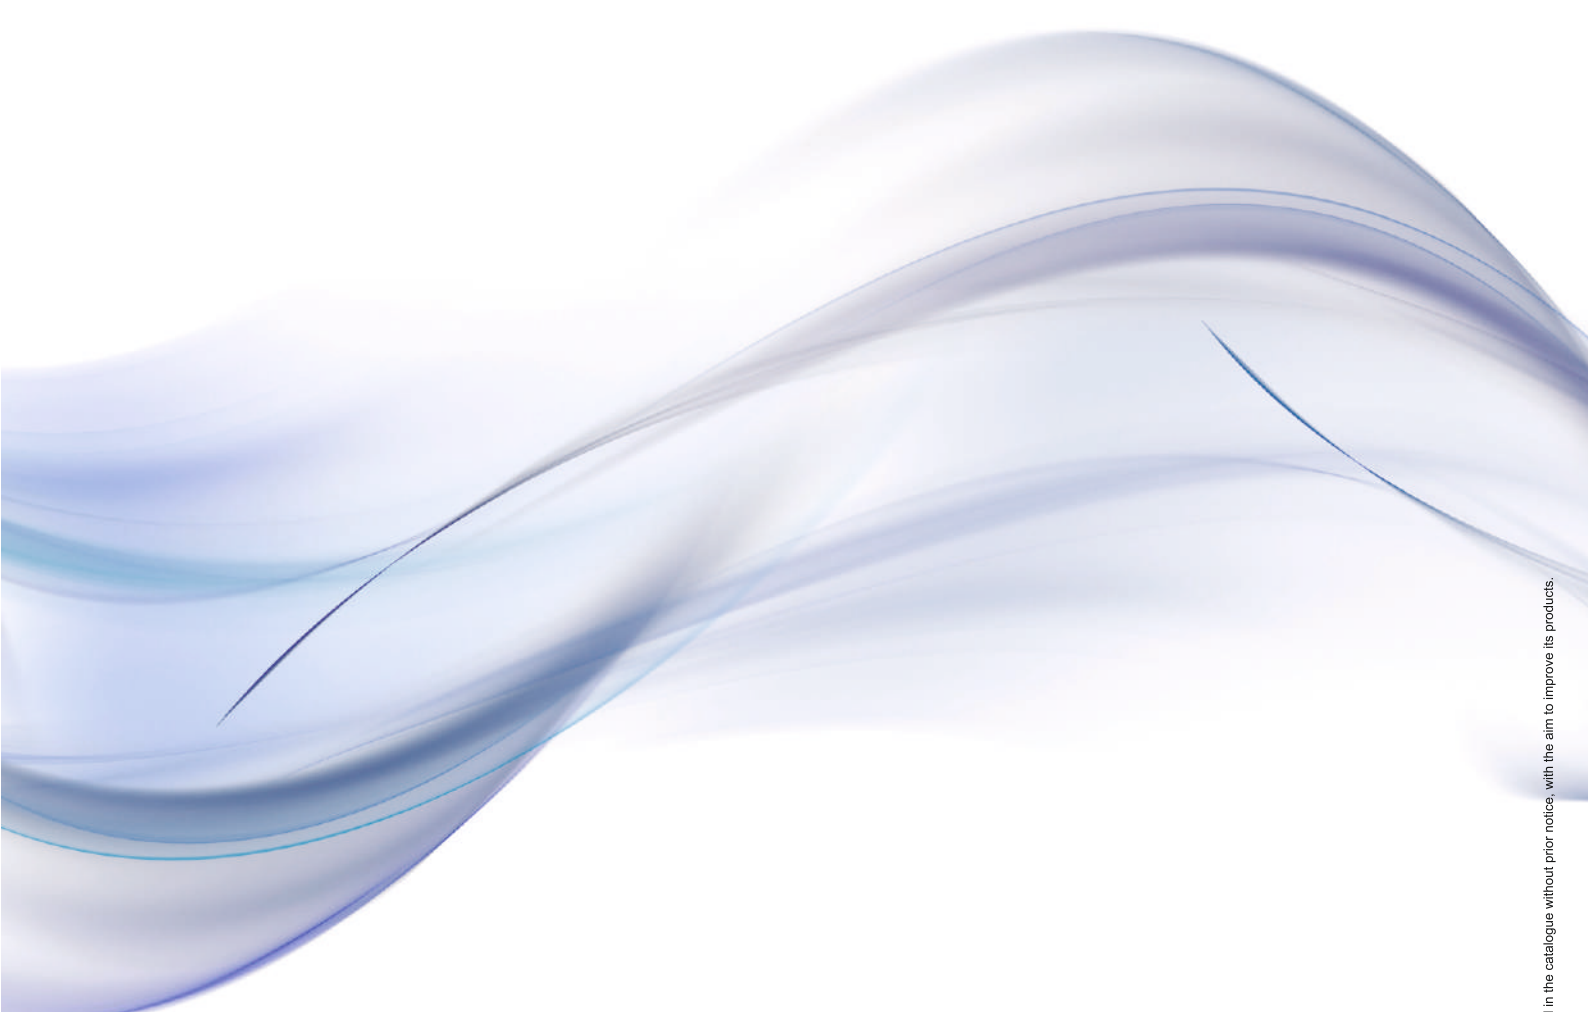

Canaletas
SOURCE OF LIFE

HEADQUARTERS AND FACTORY

Ronda de Llevant, 10
08820 El Prat de Llobregat
Barcelona (Spain)
T. +34 934 358 546

INTERNET

www.canaletas.com
www.canaletas.es
info@canaletas.es