



98/83/EC



Canaletas
SOURCE OF LIFE

HEADQUARTERS AND FACTORY

Ronda de Llevant, 10
08820 El Prat de Llobregat
Barcelona (Spain)
T. +34 934 358 546
F. +34 934 350 604

INTERNET

www.canaletas.es
www.canaletas.com
info@canaletas.es

Canaletas reserves the right to make changes considered opportune to the information contained in the catalogue without prior notice, with the aim to improve its products.

Canaletas
SOURCE OF LIFE




Series EN

Recessed Drinking fountains.

Fully recessed wall design for a greater passage space.

Made entirely from stainless steel.

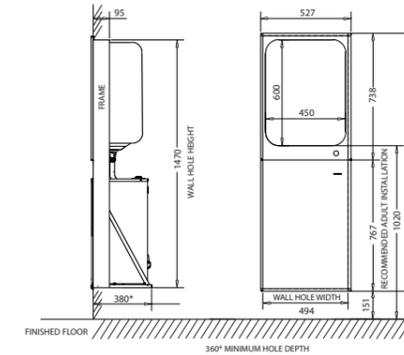

Model: EN-8TLVPV



Internal chassis
WARRANTY

Series EN

Ideal for installation in hallways, corridors, or smaller spaces.

The installation of the cooling unit and top plate behind the wall offers passage completely free of obstacles.

All elements manufactured from high thickness stainless steel:

top plate, front panels, interior structure and cooling unit.

Large interior dimensions for comfortable drinking.

A-316 stainless steel water nozzle with hygienic protection.

Anti-vandalism front push button and regulation of water height through exclusive high precision membrane valve.

Greater hygiene since the push button is separate from the water jet.

Deep rounded top plate with anti-splash design.

Removable lower ventilation panel for maintenance access.

Interior structure supporting the top plate, panels and cooling unit.

Easily regulated cold water temperature (thermostat).

Possibility of emptying the cooling unit for greater hygiene.

Models with:

LV: Top plate with glass filler and additional push button.

PV: Cup holder and disposal side accessory

Accessories



There is a specific catalogue for filters.



Model: EN-8TLV

Compact and powerful cooling unit.

Easy recessed installation.

Front ventilation toward the ventilation grilles.

Specific catalogue for the cooling unit (Series GF).



Cooling unit

Technical data

	Series EN-8
Cooling power (W)	600
Power consumption (W)	230
Voltage 230V 50Hz single-phase (A) (Consult other options)	1,1
Cooling capacity (Room temp.:30°C, Input temp: 27°C, Output temp. 17°C) (l/h)	50
Water output speed (l/h)	60
Water tank capacity (l) (Optional: Stainless steel direct chill)	4,5
Cold water output temperature (Regulated by thermostat) (°C)	4-11
Refrigerant gas (CFC-free)	R-134a
Net weight (kg) Model EN-8TLV	58