



98/83/EC



Canaletas
SOURCE OF LIFE

HEADQUARTERS AND FACTORY

Ronda de Llevant, 10
08820 El Prat de Llobregat
Barcelona (Spain)
T. +34 934 358 546
F. +34 934 350 604

INTERNET

www.canaletas.es
www.canaletas.com
infox@canaletas.es

Canaletas
SOURCE OF LIFE



Series EF

Series EF



Drinking fountains Wall mounted Barrier-Free access

Made entirely from stainless steel.



Model: EF-8TA



Model: EF-8TAC

10 Year
Internal chassis
WARRANTY

Series EF

Wall mounted drinking fountain Barrier-Free access

All the fountain construction elements made in stainless steel: Fountain top, front grill panel and also internal frame structure. Compact stainless steel A-316 bubbler with guard design. Anti-vandalic self-closing push-button with exclusive membrane internal water valve. Very precise water jet flow height regulation. Round and anti-splashing top basin. Stainless steel front panels, with removable low ventilation grill. Mounting frame to support the water cooler and place the cooling unit. Hermetically sealed, positive start compressor with lifetime lubrication and built-in overload protection. Made in Europe. Condenser, self-lubricated fan motor with thermic protection. Easily regulated cold water temperature by rotating thermostat control. Featured with a water drain tank to provide higher water security. Optional filters: Carbon block, sediment, UV filters.

Top plates floor heights & dimensions:


- A: Adult. H:1020 mm; Dim.:320(W) x 330(D) x 140(H)mm
- B: Handicapped. H:686mm (ADA); Dim.:320(W) x 457(D) x 140(H)mm
- C: Children. H:610mm (ADA); Dim.:320(W) x 330(D) x 140(H)mm

Models with:


- LV: Top plate with glass filler.
- PV: Models with stainless steel lateral accessory for cup dispenser & disposal.




Cooling unit

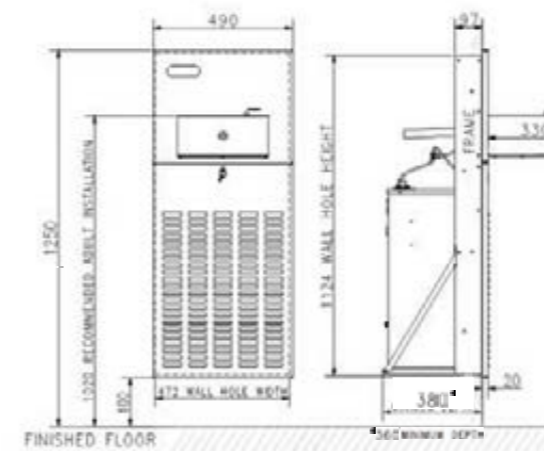

Model: EF-8TA

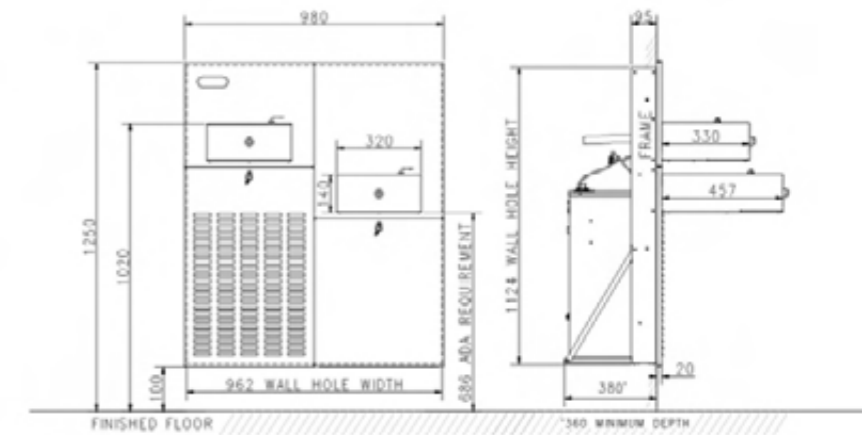

Model: EF-8TAB

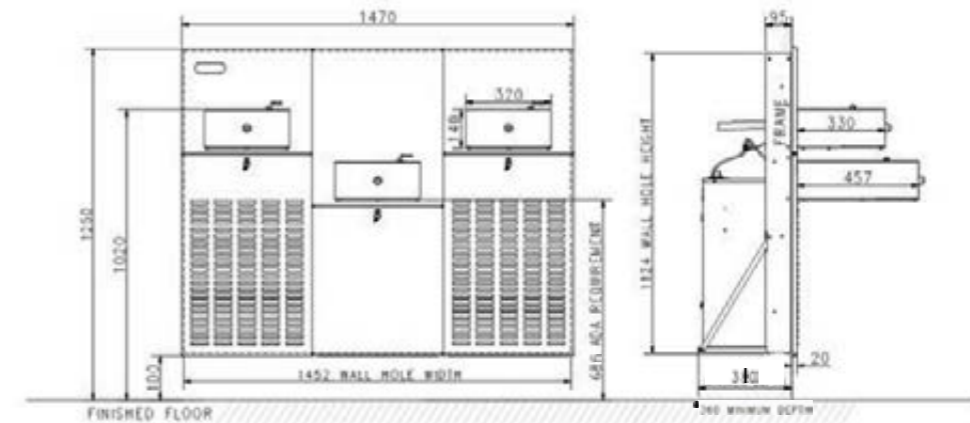

Model: EF-8TABA

Technical data

Series EF-8T

Cooling Power (W)	600
Power consumption (W)	230
Voltage 230V 50Hz single-phase (A) (Consult other options)	1.1
Cooling capacity (Room temp.: 30°C, Input temp.: 27°C, Output temp.: 17°C)(l/h)	50
Water output speed (l/h)	360
Water tank capacity (l)	4.5
Cold water output temperature (Regulated by thermostat) (°C)	4-11
Refrigerant gas (CFC-free)	R-134a